


## RJ11 6P4C / 6P6C Plug

---

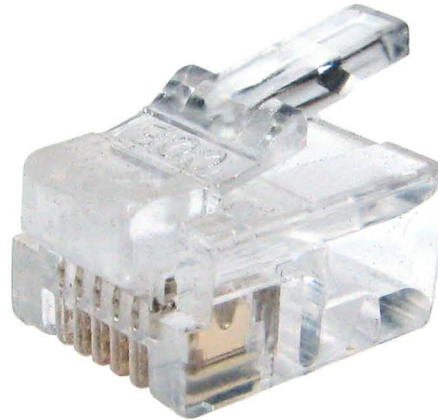

<b>Short Description</b>	RJ11 6P4C / 6P6C Plug
<b>Full Description</b>	The registered jack 11 (6P6C) is commonly known as an RJ11 6 position 4/6 contact connector, used for one telephone line ahead of the key system.
<b>Extra Information</b>	<b>Specification</b> <ul style="list-style-type: none"> <li>• Gold pins</li> <li>• 2 Prongs on pins</li> <li>• Unshielded</li> </ul>

## Cat5e 8P8C Crimp Plug


---







<b>Short Description</b>	RJ45 Plug (Stranded)
<b>Full Description</b>	RJ45 Plug (Stranded)
<b>Extra Information</b>	<b>Specification</b> <ul style="list-style-type: none"><li>• RJ-45 plug</li><li>• 50 Microns</li><li>• Gold pins</li><li>• 2 Prongs on pins</li><li>• Unshielded</li></ul>

## Cat5e 8P8C Shielded Crimp Plug

---

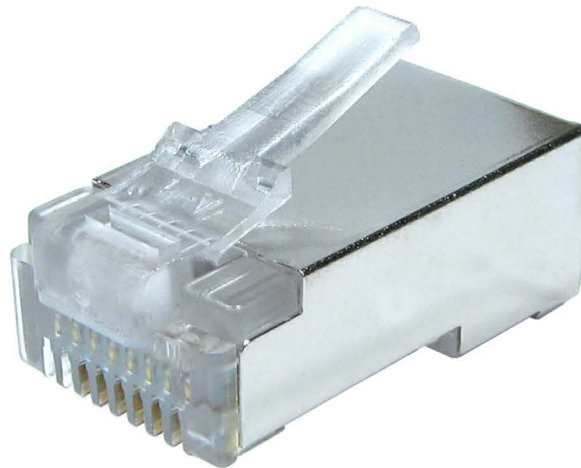


<b>Short Description</b>	Shielded RJ45 Plug
<b>Full Description</b>	Shielded RJ45 Plug
<b>Extra Information</b>	<p><b>Specification</b></p> <ul style="list-style-type: none"> <li>• 50 Microns</li> <li>• Gold pins</li> <li>• 2 Prongs on pins</li> <li>• Shielded</li> <li>• Bag of 100pcs</li> </ul>

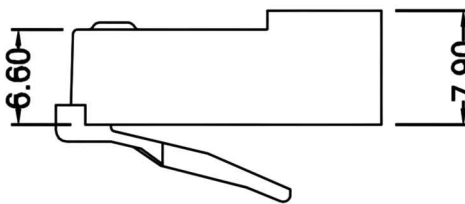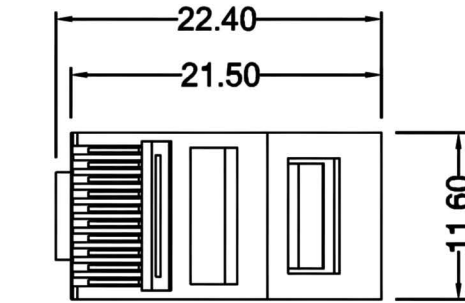

**MATERIAL & FINISH**

Body: PC. UL94V-2, clear

Contact: copper alloy, selective gold plating.

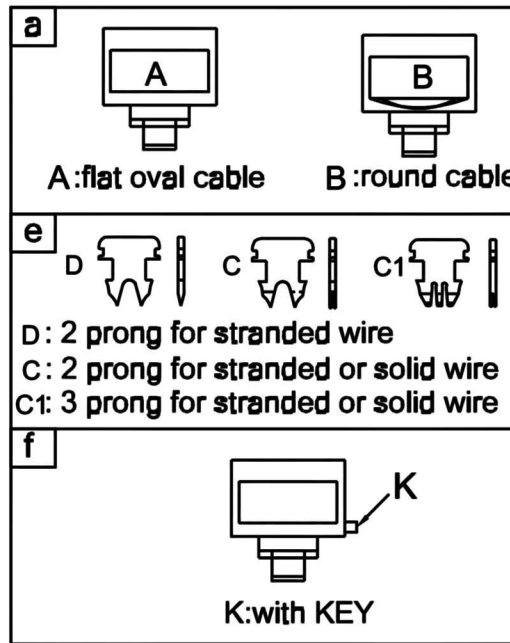

Technical Data Sheet

REV.	CONTENTS	DATE
------	----------	------

	Drawn	Lisa
	Designed	Nelson
<small>UNLESS OTHERWISE SPECIFIED TOLERANCE</small> Inch: .000 = ±0.01 .0000 = ±0.050 mm: .00 = ±0.25 .000 = ±0.130 Ang: 0.0 = ±2°	Approved	Vincent
	Rev:	A
Units	mm	

Title: PLUG/10P10C			
Part No	TL233-10PC-x-x-x	Sheet	1
Date:	27-AUG-2009	Scale	: