

# Stamped & Formed Dual Port D-Sub Connectors



### SPECIFICATIONS

#### Materials

Insulator: Polyester Resin and Glass Fiber Reinforced (UL94V-0)

Contact: Stamped and Formed Copper Alloy  
Gold Plated over Nickel

Shell: Steel, Tin Plated

#### Electrical

Insulation Resistance: 5000MΩ Min

Insertion Force: 12oz Max

Extraction Force: 0.75 oz Min

Contact Retention: 10lb(44N)Min



Connector Retention: 10lb(44N)Min,

Contact Resistance: 10m Ω Max

Current Rating: 5A

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -55°C ~ 105°C

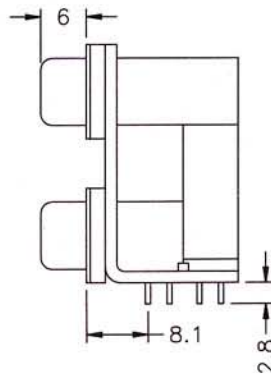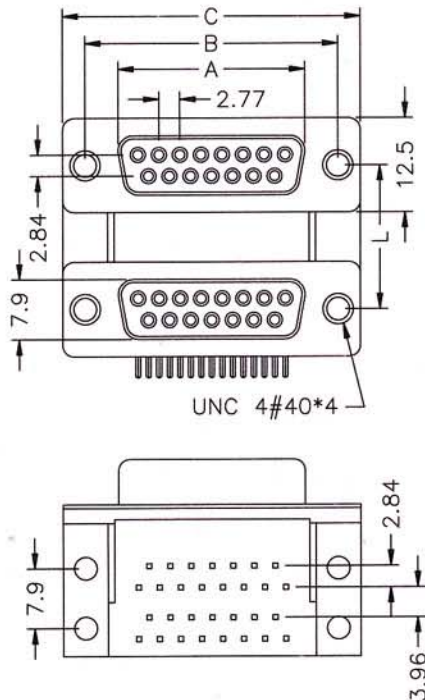


POSITION	A	B	C
9S	16.30	25.00	30.8
15S	24.60	33.30	39.2
25S	38.30	47.10	53.1
37S	54.80	63.50	69.4

POSITION	A	B	C
9P	16.92	25.00	30.8
15P	25.25	33.30	39.2
25P	38.96	47.10	53.1
37P	55.42	63.50	69.4

DIMENSION OF "L"

S	15.88
M	19.05
L	22.86

### ORDER INFORMATION



#### 1. Series No.

D-Sub

#### 3. No. of Contacts

01: 9/9    06: 15/9  
02: 15/15    07: 15/25  
03: 25/25    08: 25/9  
04: 9/15    09: 25/15  
05: 9/25    10: 37/37

#### 4. Connector Type

1: Male / Male  
2: Male / Female  
3: Female / Male  
4: Female / Female

#### 6. PCB Assembly Option

1: Snap in  
2: 4-40 UNC Screwed

#### 2. Terminal Version

DP: Dual-Port

#### 5. Distance Between 2 Connectors

S: 15.88mm  
M: 19.05mm  
L: 22.86mm