
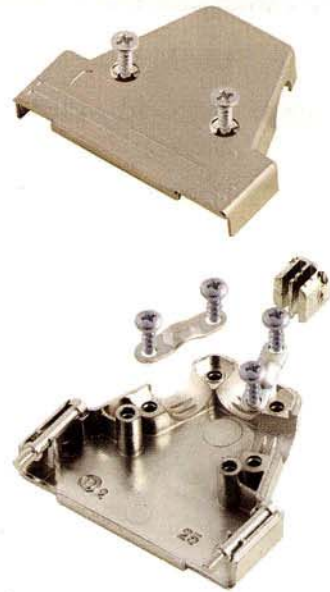


# Universal 3 Way Cable Entry Hood Metalised Plastic supplied with Short Screws

## TECHNICAL SPECIFICATIONS

<b>Material:</b>	UL 94 V-0 Plastic Material
<b>Operating Temperature:</b>	-55°C to +105°C
<b>Cable Entry:</b>	Side/Top/Side
<b>Thumbscrews:</b>	UNC 4-40 (standard) M2,5 or M3,0 on request
<b>Cable Diameter:</b>	Up to 11,5 mm

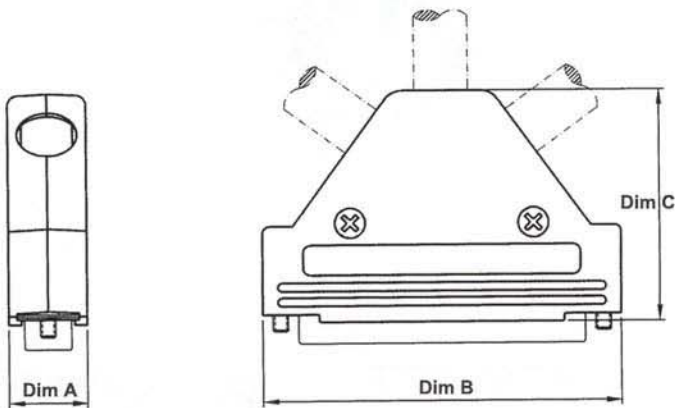

Size MHTRI-M	Dim A	Dim B	Dim C
9-way	15,0	31,0	45,2
15-way	15,0	40,3	45,2
25-way	15,0	53,5	45,2
37-way	15,0	70,0	45,2

### Features:

- Available in sizes 9-15-25-37
- All sizes feature 3-Way Entry solution
- Re-openable
- Hood is supplied with 2 Blanking Plates and 2 Strain Relief clamps. Extra Blanking Plates and/or Strain Reliefs are available on request.
- Also available in Unshielded Version