

Grey Flat IDC Ribbon Cable

28 AWG 1.27mm (0.05")

Flat Ribbon Cable available in 100ft & 250ft Rolls

- Available in 100ft & 250ft rolls
- Available in circuit sizes 10 to 64 way
- UL Recognised
- Stranded wire provides flexibility and extended product life
- Zippable for branching or discreet termination
- 28 AWG Wire on 0.05" centres permits mass termination to all other leading manufacturers IDC connectors
- RoHS Compliant
- Available from stock



Specifications

UL File No.: E189529

UL Style: 2651

RoHS Compliant

Operating Temperature: -20°C to +105°C

Flamability Rating: UL-VW-1

Voltage Rating: 300V

Electrical

Impedance: 115Ω (Unbalanced)

Capacitance: 12.2 pF/ft

Inductance: .14 μH/ft


Propagation Delay: 1.4 ns/ft

Insulation Resistance: 1GΩ/M min.

Physical

Insulation Material: Polyvinyl Chloride (PVC)

Conductor: #28AWG (7*0.127) Stranded Tinned Copper

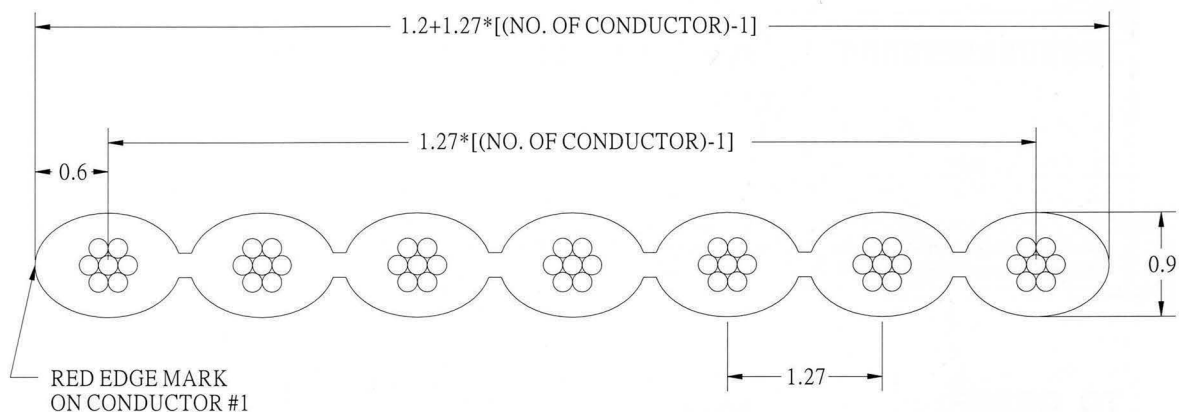

Sherwood Electronics Ltd

Units 1-2, Paragon Works, Wilsthorpe Road

Long Eaton, Nottingham, NG10 3JW

Tel No.: 0115 972 0100 Fax No.: 0115 972 1900

E-Mail: sales@sherwoodelectronics.co.uk

Web: www.sherwoodelectronics.co.uk

