

# Imported D-Sub

## Solder Bucket D-Sub.





### Stamped and Formed Contact

#### SPECIFICATION

Current Rate:5AMP  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-55°C to + 105°C

#### MATERIAL

Insulator:Polyester,UL 94V-0  
 © Standard:P.B.T  
 Contact Pin F:Phosphor Bronze  
 M:Brass  
 Shell -Steel zinc plated or tin plated or nickel plated  
 Screw-Brass nickel plated

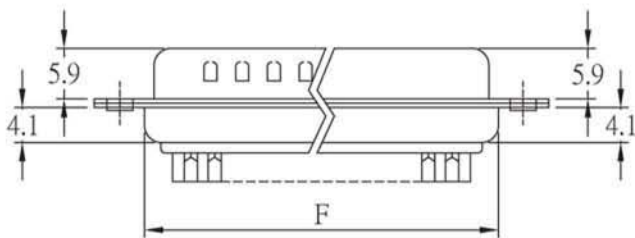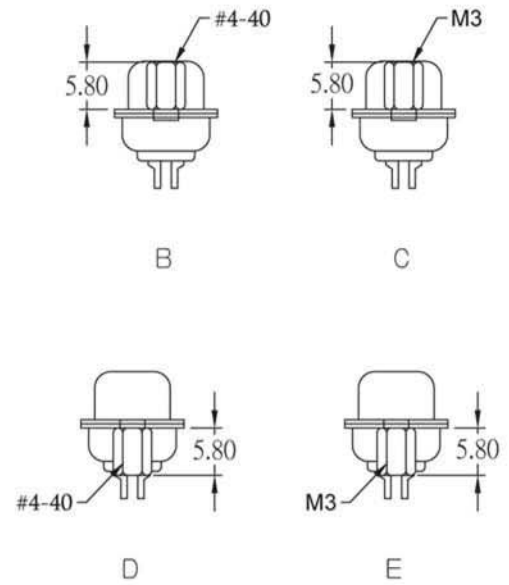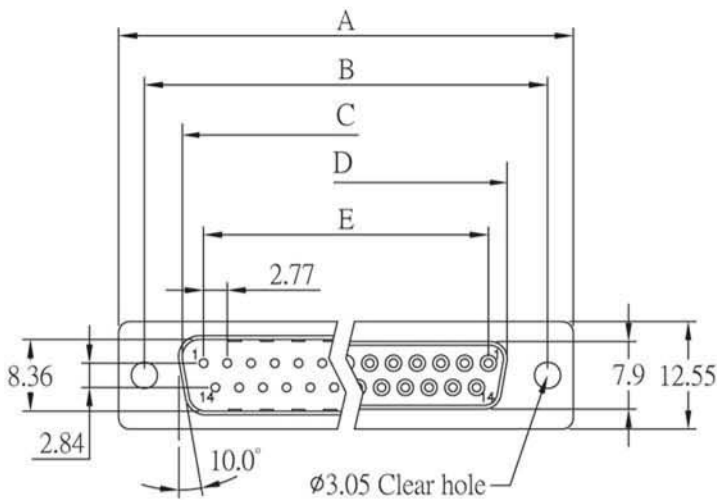

#### Dimensions

Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	19.20
15	39.14	33.32	25.50	24.66	19.39	27.70
25	53.04	47.04	38.96	38.38	33.24	41.10
37	69.32	63.50	55.42	54.84	49.86	57.30